

#### BLUESUN SOLAR CO. LTD.


Bluesun, founded in 2004, as a superior photovoltaic manufacturer, is devoted to the R&D and the production of crystalline silicon solar cells and modules for 17 years. The company has its sales areas spread all over more than 100 countries and regions in the world, and the cumulative historical shipments exceeded 12 GW.

#### PERFORMANCE WARRANTY

**12** Years Enhanced Product Warranty on Materials and Workmanship.

**25** Years Linear Power Performance Warranty\*

**0.55%** Annual Degradation Over 25 years no more than 0.55%

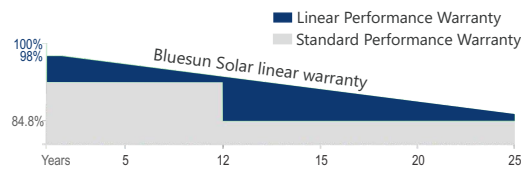

\*According to the applicable Bluesun Solar Limited Warranty Statement.

#### SPECIFICATIONS

Module Type	BSM560M10-72HPH	
	STC	NMOT
Maximum Power (P <sub>max</sub> /W)	560	4.16
Operating Voltage (V <sub>mp</sub> /V)	42.33	38.59
Operating Current (I <sub>mp</sub> /A)	13.23	10.80
Open-Circuit Voltage (V <sub>oc</sub> /V)	50.00	46.49
Short-Circuit Current (I <sub>sc</sub> /A)	14.14	11.42
Module Efficiency nm(%)	21.68	

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C,

Air Mass AM1.5, Wind Speed 1m/s



#### High module conversion efficiency

MBB Half Cell Technology, Module efficiency up to 21.68%



#### Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environments like desert, farm and coastline



#### PID Resistance

Excellent Anti-PID performance guaranteed via optimized mass-production process and materials control



#### Excellent weak light performance

More power output in weak light condition, such as overcast, morning and sunset periods




#### Extended wind and snow load tests



Module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)

#### I-V CURVE

BSM560M10-72HPH

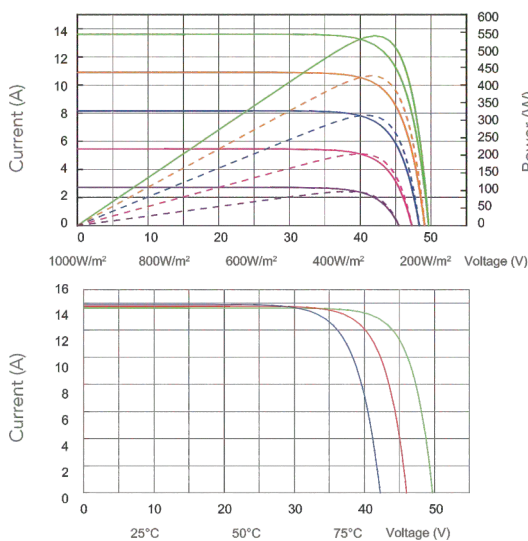

#### ENGINEERING DRAWINGS

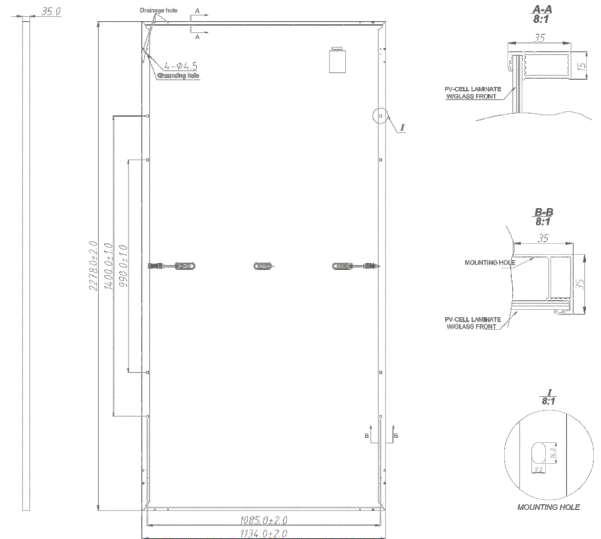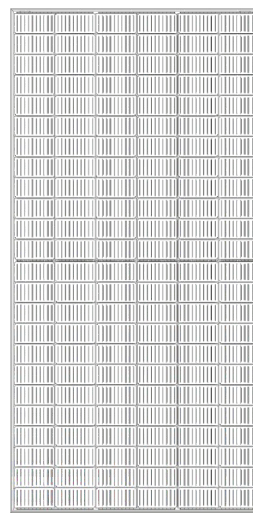

#### THE IDEAL SOLUTION FOR:



Rooftop arrays on residential buildings



Ground-mounted solar power plants

#### MANAGEMENT SYSTEM CERTIFICATES

ISO 9001:2015 / Quality management system  
ISO 14001:2015 / Standards for environmental  
ISO 45001:2018 / International standards for occupational health & safety

#### PRODUCT CERTIFICATES

IEC 61215 / IEC 61730 / TUV



#### MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	182*91mm
Cell Arrangement	144 (6*24)
Weight	28.6kg
Module Dimensions	2278*1134*35mm
Cable Length	Portrait 300mm Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm (0.006inches <sup>2</sup> ) UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3
Packing Configuration	31pcs/carton, 620pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

#### OPERATING CONDITIONS

Maximum System Voltage	1000/1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	25A
Static Loading	Snow Loading: 5400Pa Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	T01/LJQ-3-CSY/MC4/ MC4-EVO2

#### TEMPERATURE COEFFICIENT

Temperature Coefficient P <sub>max</sub>	-0.36%/°C
Temperature Coefficient V <sub>oc</sub>	-0.29%/°C
Temperature Coefficient I <sub>sc</sub>	+0.048%/°C
NMOT	45±2°C